

## Self-Propelled Rough-Terrain Scissor Lifts



### Dingli



JCPT1217RTI

JCPT1417RTI

	S.W.L	454kg	345kg
	S.W.L On Extension	136kg	136kg
	Max. Occupants	4	3
	<b>A</b> Working Height	12.00m	14.00m
	<b>B</b> Platform Floor Height	10.00m	12.00m
	<b>C</b> Overall Length (With/Without Outriggers)	3.32m/2.67m	3.32m/2.67m
	<b>D</b> Overall Width	1.73m	1.73m
	Overall Height (Rails Up)	2.60m	2.70m
	<b>E</b> Overall Height (Rails Down)	2.00m	2.10m
	Platform Size (Length/Width <b>F</b> )	2.51m×1.55m	2.51m×1.55m
	<b>G</b> Platform Extension Size	1.43m	1.43m
	Ground Clearance	0.16m	0.16m
	<b>H</b> Wheelbase	1.85m	1.85m
	Turning Radius (Inside/Outside)	1.55m/3.80m	1.55m/3.80m
	Engine	Kubota D1105	18.6kW/2400rpm
	Travel Speed (Stowed)	5.4km/h	5.4km/h
	Travel Speed (Raised)	1.1km/h	1.1km/h
	Up/Down Speed	40/37sec	50/40sec
	Gradeability	40%	40%
	Maximum Working Slope	2°/3°	2°/3°
	Hydraulic Tank	62L	62L
	Diesel Tank	55L	55L
	Tyres	26×12-16.5	26×12-16.5
	Weight (With/Without Outriggers)	4220kg/3870kg	4420kg/4070kg

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Brake System
- Anti-restart Engine Protection
- Onboard Diagnostic System
- European III Emission Engine
- Slide-out Engine Tray
- Oscillating Axle
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Hydraulic Oil Cooler
- Folding Guardrails
- All Motion Alarm
- 4WD
- Safety Brackets
- Hour Meter
- Foam-filled Tyres
- Flashing Beacon
- Tilt Sensor With Alarm

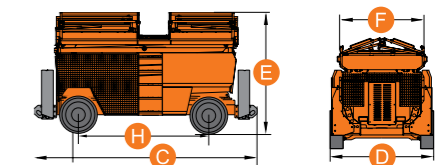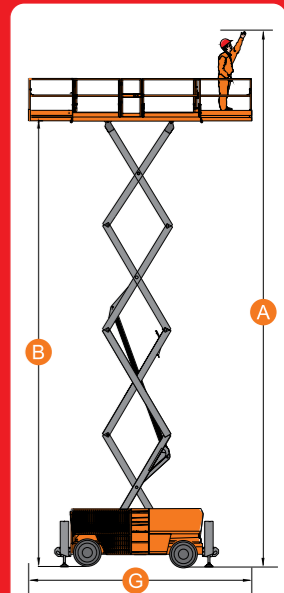

Oscillating Axle



Safety Bracket



Folding Guardrails



Brake Release Valve



Automatic Leveling Outriggers



Extended Platform



Swing-out Engine Tray



Gradeability