



## Self-Propelled Rough-Terrain (Scissor Lifts)



**Dingli** **JCPT2223RT**

	S.W.L	750kg
	S.W.L On Extension	500kg
	Max. Occupants	4
	<b>A</b> Working Height (Stowed)	22.00m
	<b>B</b> Platform Floor Height	20.00m
	<b>C</b> Overall Length	4.80m
	<b>D</b> Overall Width	2.27m
	<b>E</b> Overall Height (Rails Up)	3.68m
	Overall Height (Rails Down)	2.84m
	<b>F</b> Platform Size (Length/Width)	4.35m x 1.85m
	<b>G</b> Platform Extension Size	2.00m
	Ground Clearance	0.22m
	Wheel Base	3.13m
	Turning Radius (Inside/Outside)	2.15m/5.35m
	Engine	Kubota v2403-M-DI-36.5kW/2600rpm
	Travel Speed (Stowed)	6.0km/h
	Travel Speed (Raised)	0.7km/h
	Up/Down Speed	75/60sec
	Gradeability	30%
	Maximum Working Slope	3°/3°
	Hydraulic Tank	140L
	Diesel Tank	100L
	Tyre	30x12-20
	Weight	12040kg




### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- 4WD
- Self-leveling Hydraulic Outriggers
- Automatic Brake System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Brackets
- Folding Guardrails
- Automatic /single Roll Out Deck
- Flashing Beacon
- Slide-out Engine Tray
- Emergency Stop Button
- Anti-restart Engine Protection
- European III Emission Engine
- Hydraulic Oil Cooler
- Vertical Style Life Gate

### Options

- Overload Sensor With Alarm
- AC power On The Platform
- Hydraulic Generator
- Hydraulic Welder
- Hydraulic Compressor
- Hydraulic Water Pump
- Platform Work Lights
- Non Marking Tyres

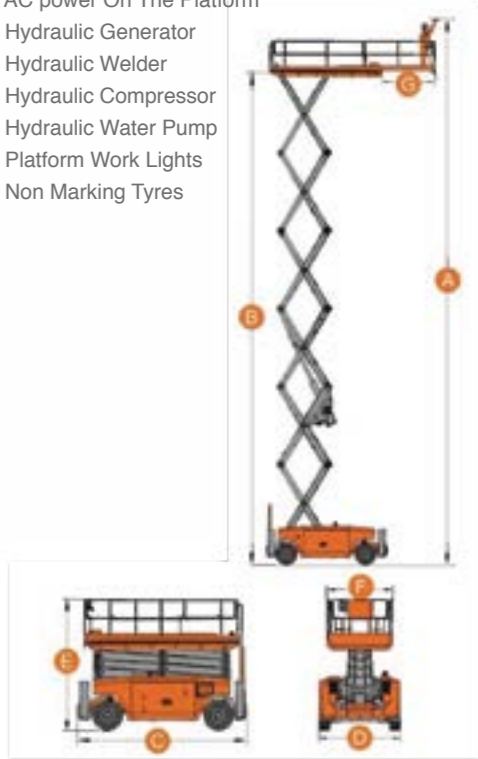

Automatic Levelling Outriggers



Flashing Beacon



Vertical Style Lift Gate



Gradeability



Extended Platform



Folding Guardrails



Swing Out Engine Tray



Safety Bracket